


INSTALLING YOUR STRAP

In order to install/remove your strap, you will need the strap itself and the spring bar tool.




Use the Spring bar tool




Spring bar tool detail

1. Pronged (forked) end / 2. Push-pin end




The bar tool is needed to remove this spring bars inside the strap from the watch case

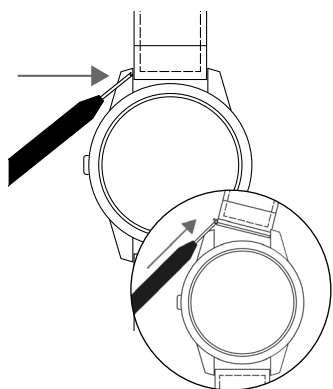


STEP 1 REMOVE PREVIOUS STRAP

Lay your watch in order to have its back facing you. Then use the pronged end side of your spring bars tool. Insert it between the strap and the watch lug. Gently apply pressure inwards to loosen the spring bar, until it pops out with the strap.




STEP 2 INSTALL THE STRAP

Install the short end of the strap (the end with the buckle). It goes at the top of the watch (the 12 o'clock side). From the back of your watch, insert one end of the spring bar into the hole on the watch lug.



STEP 4

Repeat the process on the other end of the watch. The long end of the strap (with the holes) goes on the bottom of the watch (the 6 o'clock side). Your watch is ready to be worn.



STEP 3

Use the spring bar tool provided to loosen the other end of the spring bar, so it slides inside the watch lug. Make sure both ends of the spring bar securely snap into their holes, or the strap will fall off the watch.